



PERMATANK® TRIPLE WALL:

Unparalleled Protection for Environmentally Sensitive Areas

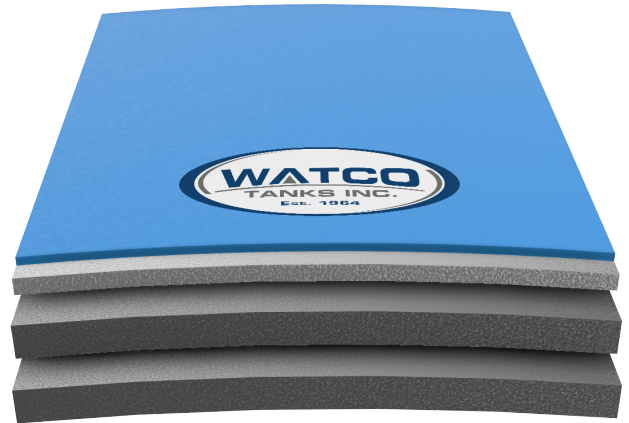

The **Permatank® Triple Wall** combines proven ACT-100® and Permatank® technologies to deliver unmatched protection. Featuring UL 58 secondary containment and a UL 1746-listed jacket for tertiary containment, this design sets the standard for advanced fuel storage. Approved by the Edwards Aquifer Authority and TCEQ since 2011, it meets the highest regulatory requirements for sensitive environments. Backed by STICO Mutual's 30-year limited warranty.

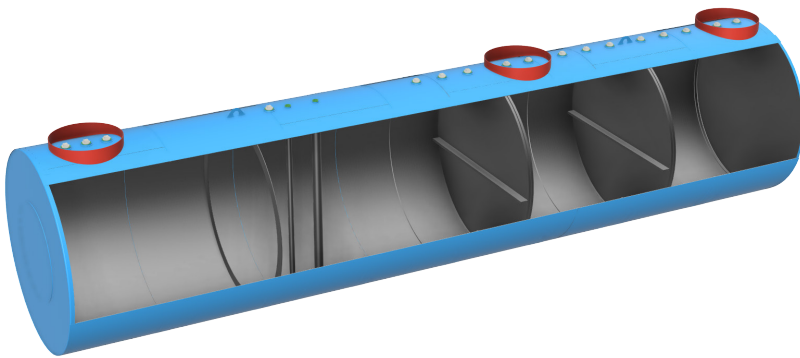

Permatank Triple Wall Advantages:

- **Primary steel tank:** For storing fuel and hazardous liquids.
- **Secondary steel wrap:** Built to UL 58 standards for added strength.
- **A tertiary wall:** Featuring STI's NextGen Permatank®, which integrates a superior corrosion-resistant coated steel in compliance with UL-1746 standards.
- **Independent secondary & tertiary monitoring pipes:** Prevent cross-communication for enhanced safety.
- **Opposing vacuum technology:** Ensures structural integrity.
- **Capacities up to 35,000 gallons:** With braced double bulkhead compartments for increased versatility.
- **Steel construction:** Ensures compatibility with all hydrocarbons and can be lined for DEF and JetA/AV Gas applications.
- **Sustainable steel construction:** Enables recycling, contributing to environmental sustainability.
- **Features a durable non-slip grip:** OSHA-level grip strength for superior safety.

(830) 947-0101 | www.watcotank.com | Scan to learn more:



Permatank® Triple Wall:

Length & Weight



Diameter	Capacity	Length +/- 2)	Weight +/- 5%
96"	8,000 gal	21'-9"	16,000 lbs
96"	10,000 gal	27'-2"	18,000 lbs
96"	12,000 gal	32'-7"	21,000 lbs
96"	15,000 gal	40'-8"	25,000 lbs
96"	20,000 gal	54'-5"	36,000 lbs
120"	10,000 gal	17'-4"	18,000 lbs
120"	12,000 gal	20'-10"	20,000 lbs
120"	15,000 gal	26'-0"	23,000 lbs
120"	20,000 gal	34'-8"	29,000 lbs
120"	24,000 gal	41'-8"	38,000 lbs
120"	26,000 gal	45'-2"	40,000 lbs
120"	30,000 gal	52'-1"	45,000 lbs
126"	30,000 gal	46'-9"	44,000 lbs
126"	32,000 gal	49'-11"	46,000 lbs
126"	34,000 gal	53'-0"	49,000 lbs
138"	30,000 gal	39'-0"	43,000 lbs
138"	35,000 gal	45'-6"	49,000 lbs



Additional Tank Options:

- 42" or 48" PCI Round Collars
- 48" Single-Wall & Double-Wall Bravo Ring Collars
- 24" or 30" Manways
- Watco Manufactured Deadman
- One-Piece Fiberglass Hold Down Straps
- Turnbuckles
- Rebar Anchor eyes
- Two-Piece Man-Out-Of-Hole Hold Down Straps

Choose the Permatank® Triple Wall for a reliable, compliant, and efficient underground storage solution that reflects our commitment to quality and customer satisfaction.

That's The Watco Way.

Watco has been a leading manufacturer of storage tanks since 1964. Our products are known for their quality, durability, and safety. We are committed to providing our customers with the best products and services.

Proven Quality Through Independent Oversight

Watco Tanks undergoes rigorous third-party inspections by UL and STI, with eight unannounced audits each year. Since the inception of the inspection program over 25 years ago, Watco has maintained a flawless record—one of only three STI-certified manufacturers to do so.

